

OAK | **MAKROS**®

TECHNICAL DATA:

BOTANICAL NAME: Quercus Petraea

FAMILY: Broadleaf Fagaceae

ORIGIN: Europe, Balkans

COMPOSITION:

1st layer: 4 mm Oak

2nd layer: 7 mm Conifer

3rd layer: 4 mm Oak

FORMAT: 15 x 150/160 x 1900 ÷ 2400 mm

PROFILE: T & G (Tongue & Groove)

BEVELLING: Micro-bevel on all 4 sides

GRADING: STANDARD ♦

HUMIDITY RATE: 8% ± 1%

THERMAL CONDUCTIVITY: 0.14 W/mK

CE MARKINGS:

CE - EN 14342:2013

Fire Resistance Class: CflS1


Formaldehyde: E1

Pentachlorophenol content: <5 ppm



1-strip plank, offset in oak or wood with equivalent traction. Since the planks have a large format, sapwood, colour variations and marked veins are allowed, as well as medium sized knots. Brushed surface; high-resistance water-based lacquer, suitable for high-volume wear and tear. Available in thirteen (13) different colours.

Registered at the Patent Office in Rome.

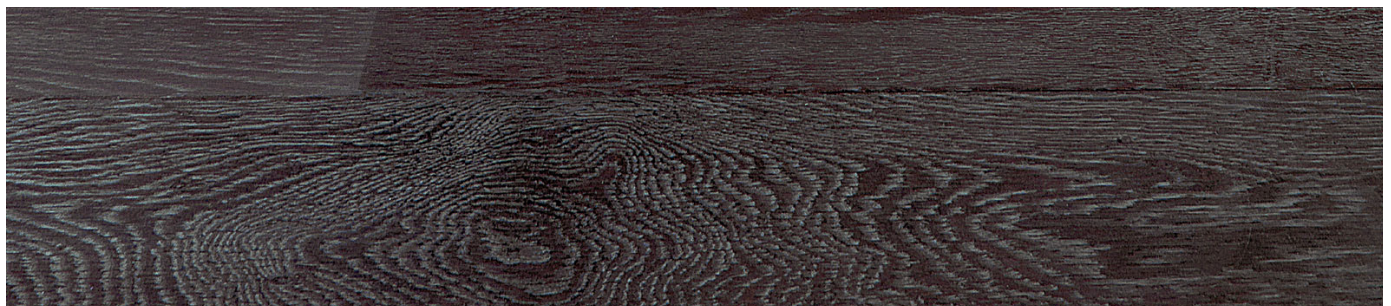

Parkemo Italia Srl **Pavimenti in legno**

Via Marmolaia, 4 - It 38033 Cavalese (TN) T. +39.0462.235603 | F. +39.0462.342118 | info@parkemo.it | www.parkemo.it