

ASH | DECKSTERNO

TECHNICAL DATA:

BOTANICAL NAME: Fraxinus Excelsior
FAMILY: Oleaceae
ORIGIN: Europe, Asia Minor and North America
DURABILITY: Class 1
SURFACE: Hard with good elasticity (-5% from natural)
DIMENSIONAL STABILITY: High
HUMIDITY RATE: Low
DENSITY (KG/M3): 590
RESISTANCE TO DEFORMITY (N/mm2): 96.60
AXIAL COMPRESSION LOAD BREAKPOINT: 61 mPa +/- 9
AVERAGE HUMIDITY % TT 215° (interior): 4.6%
AVERAGE HUMIDITY % TT 215° (exterior): 7.9 %
SURFACE HARDNESS: (N/mm2): 29.4
COLOUR: Coffee Brown
FIRE RESISTANCE Class: 1. (highly resistant)

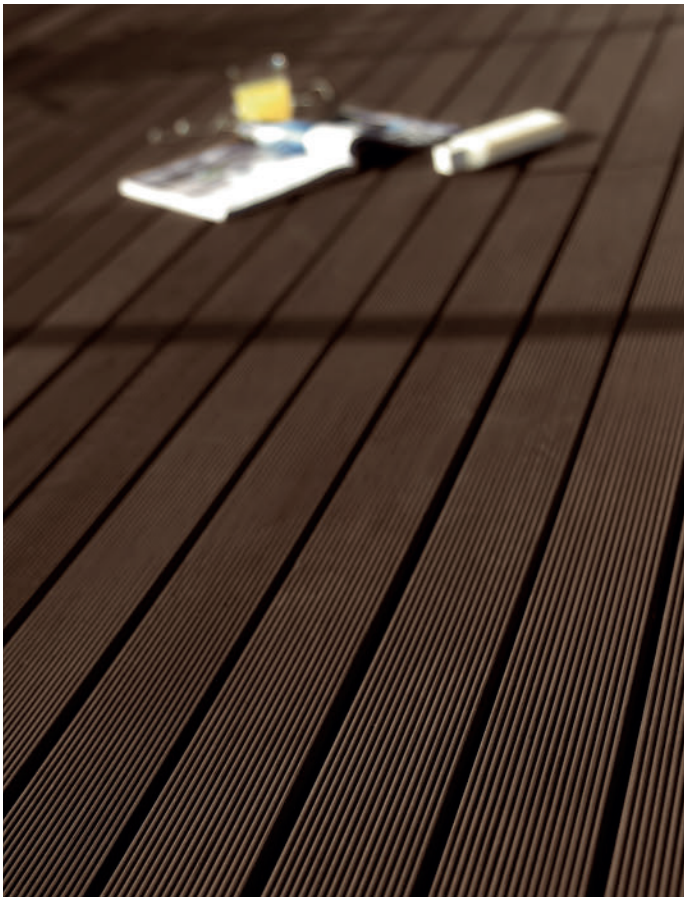

Ash wood lends itself to heat treatment.
When heated to temperatures above 200° C the hardness improves significantly, approximating that of tropical hardwoods.
No chemicals are used during the heat treatment process and the end result is a completely environmentally-friendly product.

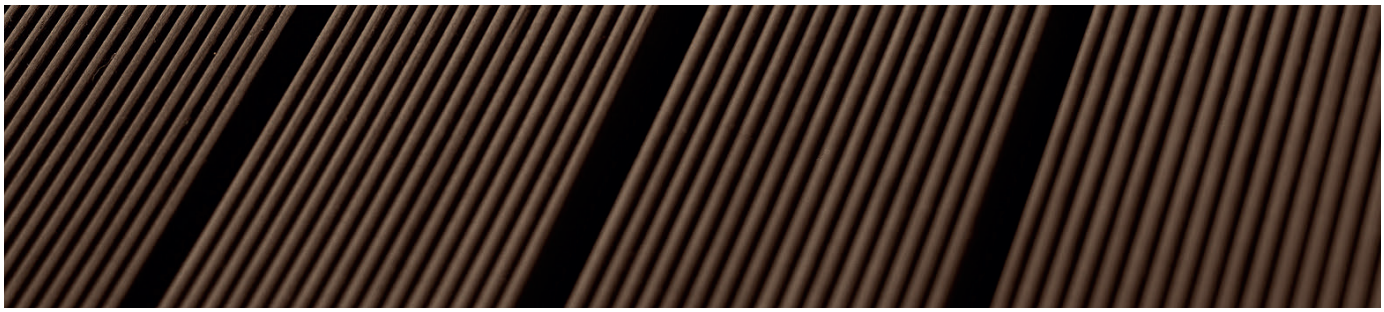

AROUND THE WOOD WORLD

Parkemo Italia Srl Pavimenti in legno

Via Marmolaia, 4 - It 38033 Cavalese (TN) T. +39.0462.235603 | F. +39.0462.342118 | info@parkemo.it | www.parkemo.it