

# OAK | SUPERTHERMO

## TECHNICAL DATA:

**BOTANICAL NAME:** Quercus Petraea

**FAMILY:** Broadleaf Fagaceae

**ORIGIN:** Balkans, Eastern Europe

**COMPOSITION:**

1st layer: 4 mm Oak

2nd layer: 7 mm Conifer

3rd layer: 4 mm Oak

**FORMAT:** 15 x 200 x 2000 ÷ 2400 mm

**PROFILE:** T & G (Tongue & Groove)

**BEVELLING:** Micro-bevel on all 4 sides

**GRADING:** STANDARD ♦

**HUMIDITY RATE:** 8% ± 1%

**THERMAL CONDUCTIVITY:** 0.14 W/mK

**CE MARKINGS:**

CE - EN 14342:2013

Fire Resistance Class: CflS1

Formaldehyde: E1


Pentachlorophenol content: <5 ppm



1-strip plank, offset in oak or wood with equivalent traction. The entire top layer is thermo-treated, which gives the product a deep brown and warm colour enhancing the natural wood characteristics such as a natural flaming - more or less light. The natural oxidation process lightens the product over time.

Available in Chiaro (Light) or Scuro (Dark) version.  
Available sanded or brushed, natural or invisible oil.

Also supplied in mixed widths as well as in special finishes including hand planed, sawcut, distressed, etc., made to order.

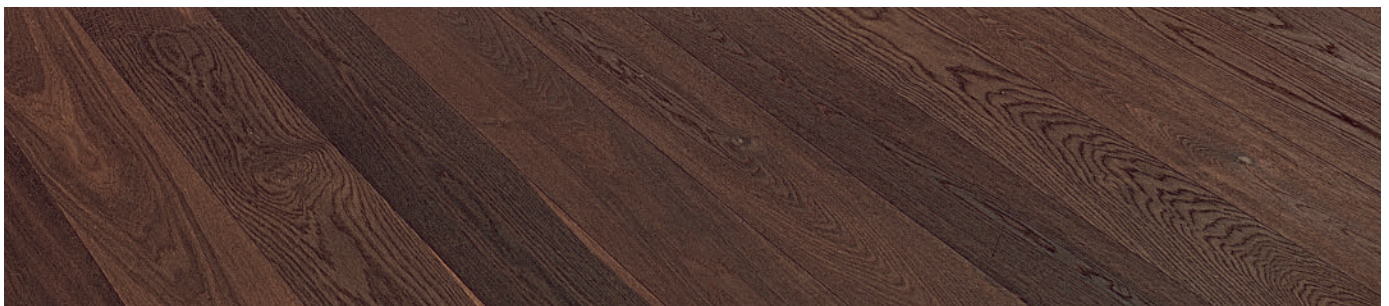

**Parkemo Italia Srl Pavimenti in legno**

Via Marmolaia, 4 - It 38033 Cavalese (TN) T. +39.0462.235603 | F. +39.0462.342118 | [info@parkemo.it](mailto:info@parkemo.it) | [www.parkemo.it](http://www.parkemo.it)